

Location Based Services

David Tipper
Associate Professor
Graduate Telecommunications and Networking Program
University of Pittsburgh
Slides 14

Location Aware Services



- Industry forecast that the location services marketplace in the United States will generate \$8 billion annually by 2006 - \$40 billion worldwide in 2006

- Location Based Applications (LBA)

- Applications capable of finding the geographical location of an object and providing services based on the location information
- *Not only in mobile systems* (911)
- Examples for mobile systems
 - Traffic updates
 - Next bus
 - Friend finder
 - Direction to nearest X (X – is hospital, store, bar, etc.)





Location Aware Services



- Technology originally driven by E-911 mandate in U.S. – goal was to develop systems to locate emergency cell phone calls
- Now many applications envisioned
 - Emergency Services
 - Navigation
 - Directions
 - Traffic management
 - Information
 - Entertainment, shopping info, advertisements
 - Tracking
 - Vehicle tracking, people tracking
 - Billing
 - Location sensitive billing
- Systems currently being deployed or in use
 - some use rough location information (cell and sector id) others more detailed
 - Cingular M-life buddy finder,
 - Telecom Italia Guardian Angel
 - 3 proximity dating service




Telcom 2720

3

Taxonomy of Location



- Absolute and Relative Location
 - Absolute uses a reference grid (Longitude, Latitude)
 - Relative depends on its own frame of reference
 - Nearest hospital to car accident
- Physical and Symbolic Location
 - Physical Location
 - Uniquely identifies a point on 2D or 3D map of the earth
 - Symbolic location
 - Coarsely identifies a physical location
 - School, work, home, etc.

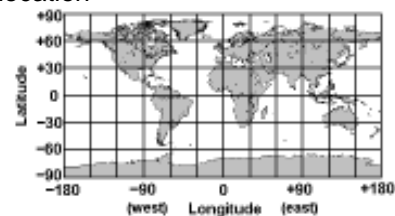

Telcom 2720

Location Accuracy




- Accuracy needed depends on application

Service	Example	Accuracy
Emergency	911 call	Medium-high
Navigation	directions	High
Information	Mobile Yellow Pages, Advertisement	Medium
Tracking	Vehicle Tracking	Low
Billing	Location based billing	Low to medium

Telcom 2720

5

Location Services Examples

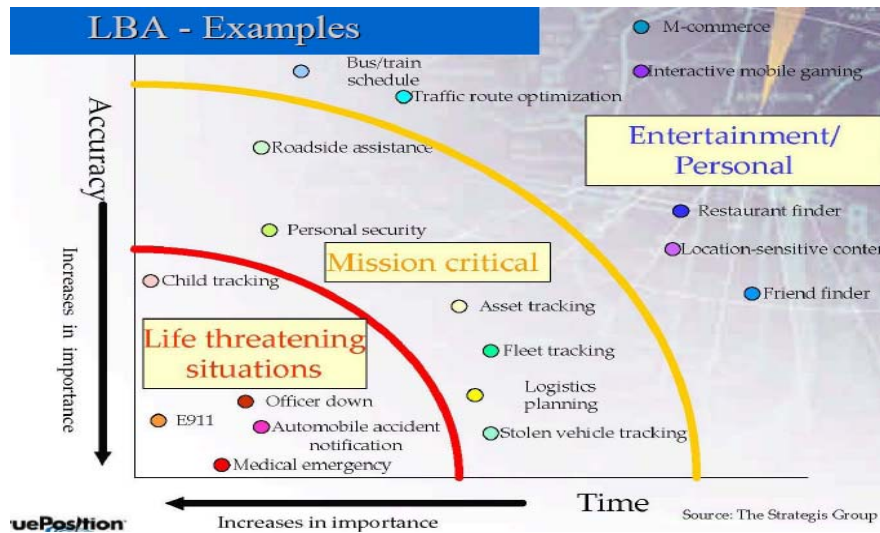

Telcom 2720

6



Enhanced 911



- Location data accompanied with 911 call, expedites emergency response time – can save lives
- FCC mandate (94-102) driving demand for location capability
 - Phase I
 - Wireless carriers to supply cell site, sector, and call-back number for 911 calls.
 - Phase II - By December 31, 2004,
 - Undertake reasonable efforts to achieve 100% penetration of Assisted Location Information (ALI) -capable handsets in its total subscriber base.
- Requires public safety answering point (PSAP) capable of displaying position data

Telcom 2720

7

FCC 94-102 Phase II Location Accuracy Requirements



- FCC Requirements for Location Accuracy
- For network-based solutions
 - 100 meters for 67% of 911 calls, and
 - 300 meters for 95% of 911 calls
- For handset-based solutions
 - 50 meters for 67% of 911 calls, and
 - 150 meters for 95% of 911 calls
- Both approaches require the use of wireless location technology
 - Equipment and algorithms added to network to find user position
 - Location technology options are similar regardless of wireless technology (GSM, IS-95, UMTS, WLAN, etc.)
 - Timing, Triangulation, Received Signal



Telcom 2720

8



Location Technology




- **Network-Based Approaches**
 - add equipment to network to locate mobile
 - Time Difference of Arrival (TDOA)
 - Angle of Arrival (AOA)
 - Multipath Analysis (MPA)
- **Handset-Based Approaches**
 - Handset determines location and reports it to the network
 - Global Positioning System GPS
 - Advanced Forward Link Trilateration
- **Hybrid (Network+ user assisted approach)**
 - Combine handset and network based techniques
 - Assisted GPS A-GPS
 - Enhanced Observed Time Difference (EOTD)



Network: Time Difference of Arrival (O-TDOA)




- Uses existing cell towers/APS and infrastructure to triangulate user's location
- Uses very accurate clocks to determine the difference in time in which uplink radio signal from user reaches different cell sites.
- Difference in time is resolved to determine position, velocity, and heading.
- Can use the same idea with received signal strength but not accurate enough due to obstructions, multipath, etc.
- Need synchronization of cell sites.

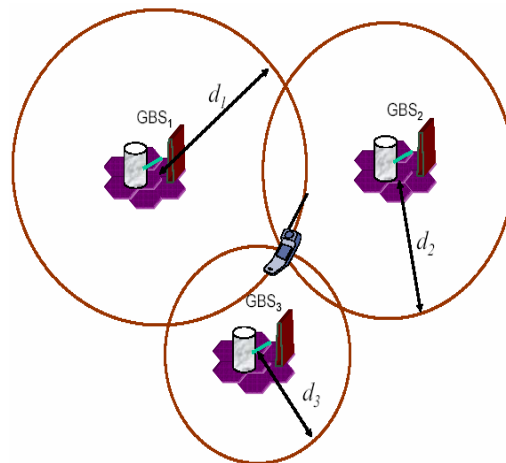

Network: Angle of Arrival



- Requires specialized listening receivers to be placed at the base station
- Requires construction of directional uplink antenna array onto existing cell towers (similar to spot beams)
- Measures the direction of signal received at multiple towers with respect to antennas of known position to determine mobile position
- Requires 2 or more basestations or sectors to receive the signal

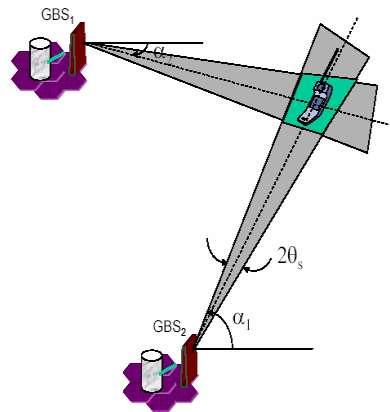

Telcom 2720

11

Network: Multipath Analysis



- Constructed a database of the received uplink multipath signal on a location grid for a specific service area
- Uses existing cell towers and infrastructure, may require additional specialized receivers to be placed at the base station to improve accuracy
- Uses the multipath database to match the transmitter's signal characteristics to determine a point on the location grid
- Also called *fingerprinting* of locations
- Can be very accurate – time consuming



Telcom 2720

12


Handset: Global Positioning System



- Requires GPS receiver and GPS antenna to be imbedded into the mobile phone
- Requires traffic or control channel resources for handset to transmit location data
- Employs signal timing techniques from four or more satellites from a constellation of 24 to determine position
- Can require a significant time to compute position.
- GPS signal hard to pick up indoors or dense urban environment

Step 3: Getting perfect timing

A fourth satellite makes timing perfect




Telcom 2720

13

Handset: Advanced Forward Link Trilateration



- A Time Difference of Arrival technique using the handset's receiver and the downlink radio signal
- MS needs to receive 3 or more BS signals at sufficient signal strength to triangulate its position
- Requires phones with precise timing.
- Needs systemwide Base Station Synchronization
- Requires traffic/control channel resources to transmit location data from handset

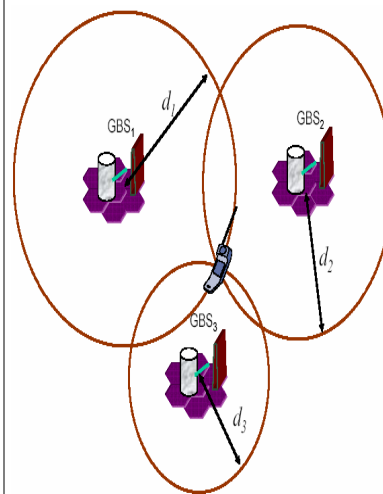


Telcom 2720

14

Hybrid : Assisted Global Positioning System (A-GPS)



- Requires GPS receiver and GPS antenna to be imbedded into the mobile phone
- Requires special GPS servers to be placed throughout the area of coverage to assist mobile receivers with acquiring GPS signals or re-radiating GPS signal to indoor/shadowed areas
- Mobile GPS receivers communicate with stationary GPS servers to assist in position determination – helps speed up calculation and indoor acquisition
- Requires traffic/control channel resources to transmit assistance and location data

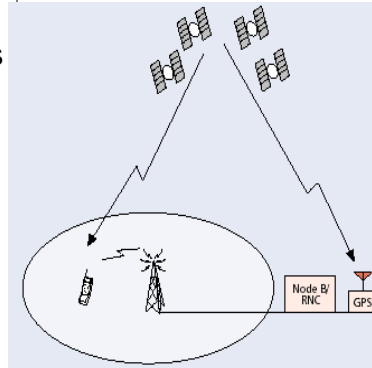


Telcom 2720

15

Hybrid: Enhanced Observed Time Difference of Arrival (E-OTDA)



- A Time Difference of Arrival technique using the handset's receiver and specialized reference receivers to triangulate position
- Use Forward and Reverse Link measurement
- Requires phones with precise timing.
- Requires addition of new uplink receivers throughout the network
- Requires traffic/control channel resources to transmit assistance messages and location data

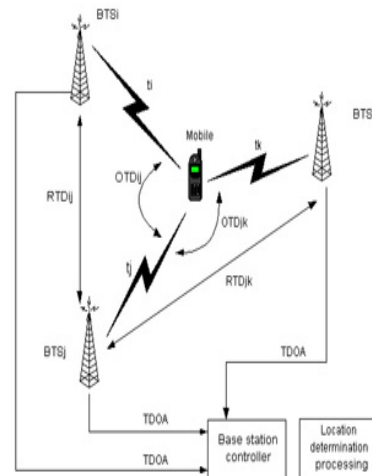

Telcom 2720

16

Implementation Considerations



- Network-based approaches
 - Additional equipment in base station
 - Use of telecommunication links between base station and mobile switch
 - Added system testing
 - Added system maintenance
 - Cost/scalability
- Handset-based approaches
 - Additional equipment in base station
 - Additional equipment (servers) in network
 - Use of air interface resources between mobile station and base station
 - Use of telecommunication links between base station and mobile switching center
 - Added system testing
 - Added system maintenance
 - *Handset upgrades/replacement*
 - Distribution/inventory logistics

Accuracy




Technique	Handset Impact	Resolution
TDOA	NO	300-500m
AOA	NO	300-500m
MPA	NO	1-5M (depends on grid size)
GPS	Yes	3-5 M
AFLT	YES	50-200M
EOTD	YES	50-200M
AGPS	YES	3-30M

Basic Cellular Architecture for IS95/CDMA 2000



- Basic architecture common to all approaches
- Requires network to overlay/retrofit new equipment
- Operators are slowly rolling out – using waivers from FCC

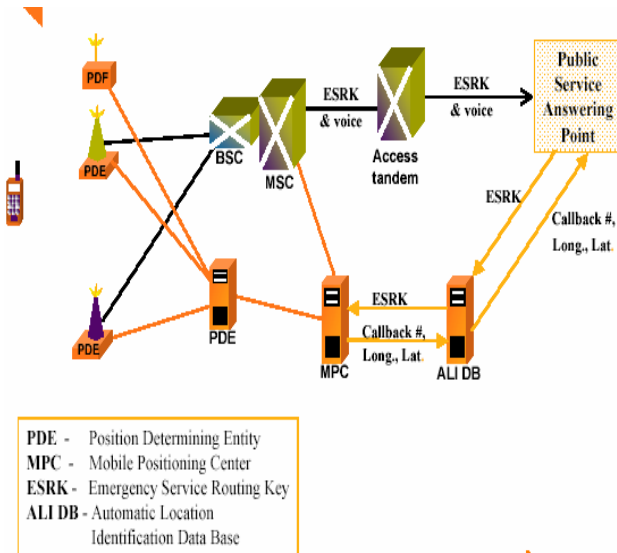

Telcom 2720

19

Evolving Standards for Location Tracking



- CTIA
 - TR 45.5
 - geolocation network support for AMPS, NA-TDMA, IS-95
 - E-OTDA, A-GPS options for each technology
- 3GPP
 - GSM, GPRS, EDGE, UMTS
 - E-OTDA, A-GPS options for each technology
- 3GPP2
 - cdma 2000 (UWC-136B) network assisted A-GPS
- USA Service Provider Techniques Adopted
 - Verizon, Sprint: A-GPS,
 - AT&T, T-Mobile: E-OTDA
- Open Mobile Alliance

Telcom 2720

20

OMA Location Architecture



- Open Mobile Alliance (OMA)
 - <http://www.openmobilealliance.org>
 - Location working group - absorbed earlier work by Location Interoperability Forum (LIF)
- LoCation Services (LCS) Architecture
 - Leverages normal infrastructure for transport and resource management - independent of wireless location technology used
- LCS Architecture Components
 - UE (User Entity)
 - may assist in position calculation
 - LMU (Location Measurement Unit)
 - Maybe required or not depending on location technology approach adopted – if used is distributed among the cells
 - SMLC (Serving Mobile Location Center)
 - Coordinates measurements to determine location
 - GMLC (Gateway Mobile Location Center)
 - Location server for outside queries



Telcom 2720

22

OMA LCS Architecture



**Gateway
Mobile Location
Center**


**Serving
Mobile Location
Center**

- Two Key Components in backhaul
- Gateway Mobile Location Center
 - Application interface for location services
 - Application Authentication
 - Privacy checking
 - Interrogates HLR to find visited MSC/SGSN
 - Roaming user can be located
 - Called Mobile Positioning Center (MPC) in IS-95/3GPP2
 - Standalone equipment or integrated into GMSC
- Serving Mobile Location Center
 - Determines the location
 - Talks to access network and user device
 - Standalone equipment or integrated into BSC/RNC or MSC/3GMSC
 - Called Position Determining Entity (PDE) in IS-95/3GPP2

Telcom 2720


25

OMA Location Architecture for UMTS/GSM

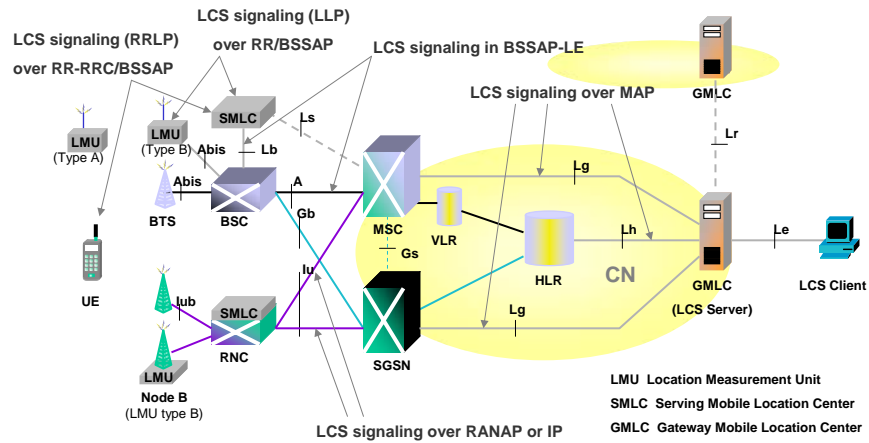


Telcom 2720

26

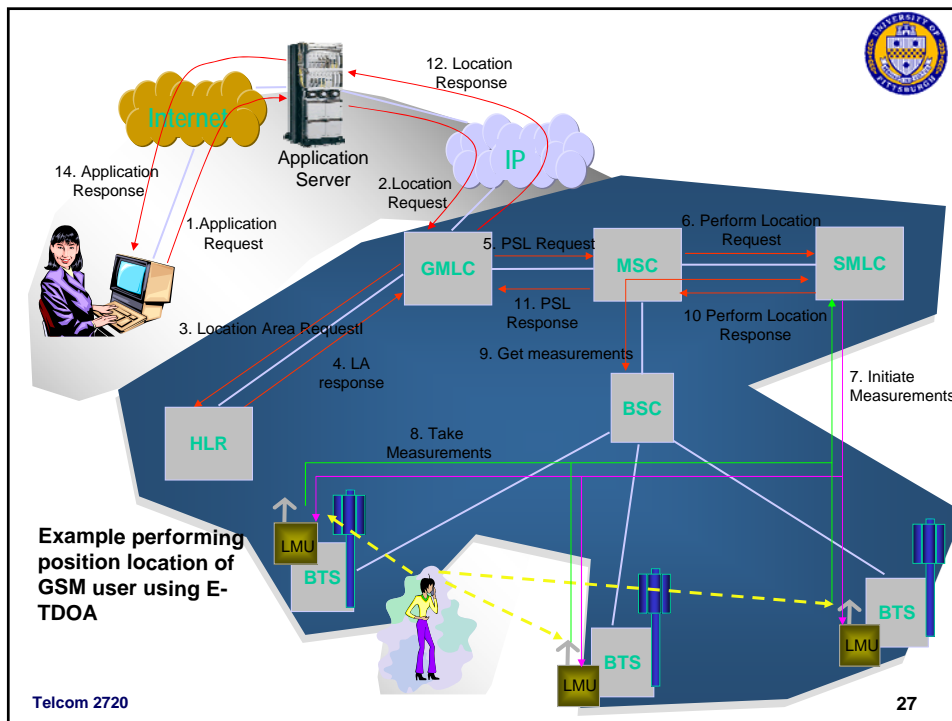



Telcom 2720

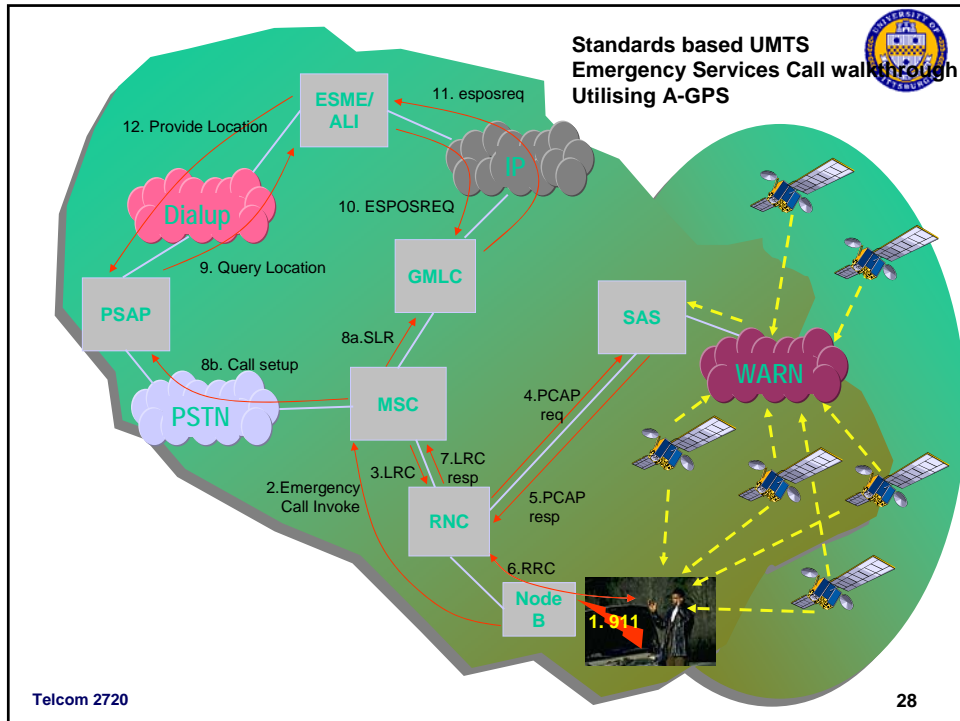27



Location Requests

- MLP – Mobile Location Protocol
 - from Location Interopability Forum (LIF) -> now part of Open Mobile Alliance
 - based on HTTP/SSL/XML
 - allows Internet clients to request location services
 - Response includes *quality* of the location estimate
 - GMLC is the Location Server
 - UE can be idle, but not off !
 - Immediate or deferred result, can request periodic updates

Telcom 2720 29

MLP Services



- **Standard Location Immediate Service (SLIS)**
 - Provide location of mobile user to an LCS client based on LCS client's request
- **Standard Location Reporting Service (SLRS)**
 - Provide location of mobile user to an LCS client based on user's request
- **Triggered Location Reporting Service (SLRS)**
 - Provide location of mobile user to an LCS client based on preset events (e.g., time of day)
- **Emergency Location Immediate Service (ELIS)**
 - Provide location of mobile user to an LCS client based on emergency LCS client's request (e.g., police)
- **Emergency Location Reporting Service (SLRS)**
 - Provide location of mobile user to an LCS client when an emergency call is placed (e.g., 911)